




# GR-7<sup>TM</sup> ROOF AND WALL

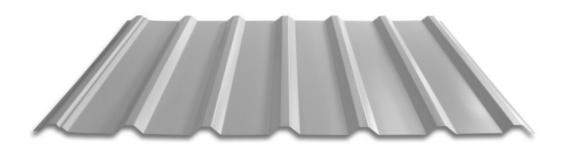

### LAP DETAIL

# **ROOF & WALL PROFILE**





GR-7™ manufactured in 29 gauge does not include a purlin bearing leg on the underlap rib.

# **KEY FEATURES**

- 29, 26, 24 and 22 Tru-Gauge<sup>™</sup> and Rusteel Plus and .032" Aluminum
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1' to 45'
   (For longer length panels, please inquire)
- · Long length flashings available up to 20' 11"
- Standard trim, custom trim and accessory packages available
- · Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- · Fiberglass panels available to match profile
- Manufactured in Salem OR and Riverside CA
- OverEZee™ retro-fit systems available

# **TESTING**

- Code compliance UL Evaluation Report UL ER #25913-01. Construction No. 137, 244
- UL 790 Class A (ASTM E108) Fire rated
- UL 2218 Class 4 Impact (hail) rated
- · ASTM A653/A924 G90 Galvanized
- ASTM A792 Zincalume/Galvalume AZ-50/55
- · ASTM E1680 Air infiltration (roof)
- ASTM E1646 Water infiltration (roof)
- ASTM E331 Water infiltration (wall)
- ASTM E283 Air infiltration (wall)



## **MATERIAL SPECIFICATIONS**

- 24 Tru-Gauge™ Kynar 500® Painted Steel
- ▲ 22 Tru-Gauge™ Kynar 500® Painted Steel
- + .032" Kynar 500® Painted Aluminum
- 24 Tru-Gauge™ G-90 Galvanized or AZ-50
- 24 and 22 Tru-Gauge<sup>™</sup> bare Zincalume® Plus AZ-55 (No finish warranty – 25 yr. perforation warranty)
- G-90 Galvanized or AZ-50
- 24 Tru-Gauge™ Bonderized
- 22 gauge Rusteel Plus™ (A606) (No finish warranty – no perforation warranty)
- Kynar 500® and substrate testing data available (See website)

#### SMP MATERIAL SPECIFICATIONS

29 & 26 Tru-Gauge™ ARMORTECH™ Painted Steel


# STANDARD COOL ARMORTECH™ SMP COLORS



#### STANDARD COOL KYNAR 500® COLORS

40-Year Residential / 20 and 30 Year Commercial Manufacturer's Limited Warranty



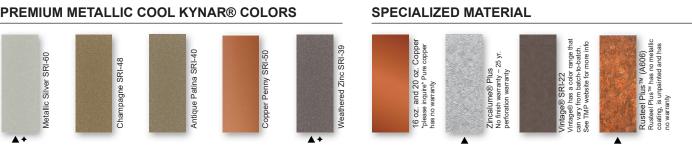

These printed chips provide a close representation of the colors

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing.\*\*\*Oil canning is not a cause for material rejection\*\*\*









Rev. Date 02-24